


BB730 Battery Replacement Procedure


1) Remove End Cap

- Insert Phillips head screw driver and remove the four screws (see Figure 1). **NOTE** – Replacement screws are available from Btracking
- Remove the end cap and set aside

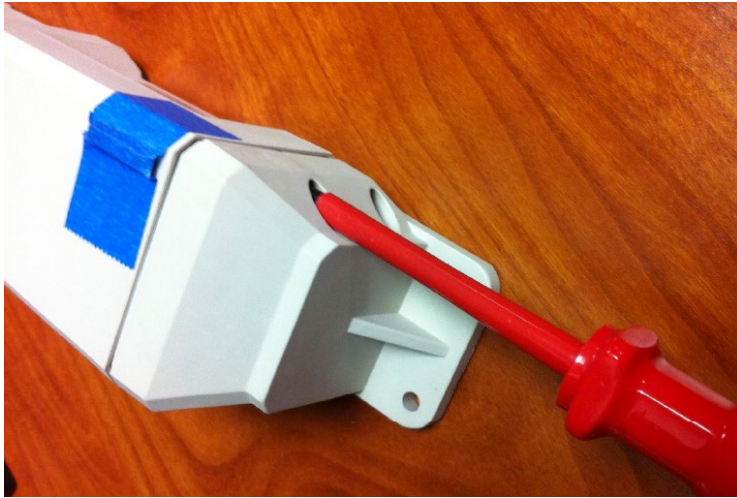


2) Disconnect Power Cable

- Remove the rubber gasket and set aside
- Disconnect the red and black power wires by pulling the two white connector halves apart. Do **NOT** pull on the power wires.

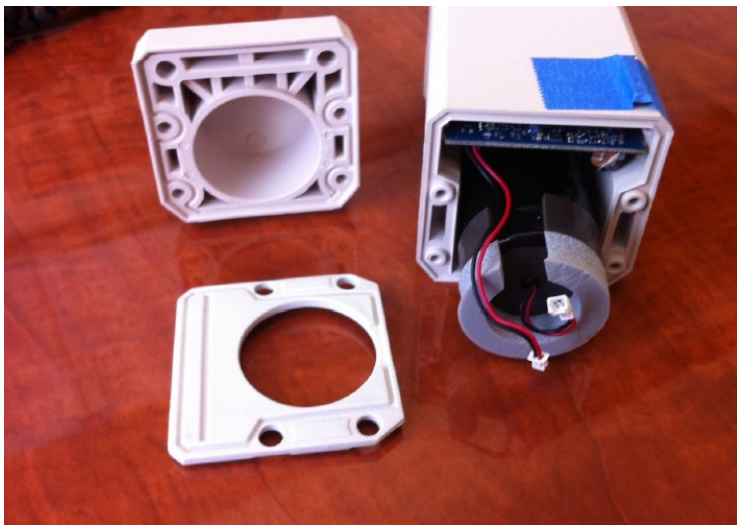

3) Remove Battery Pack

- Ensure gap in battery pack foam is aligned with device power cable
- Slide battery pack (the black metal tube) out of the enclosure

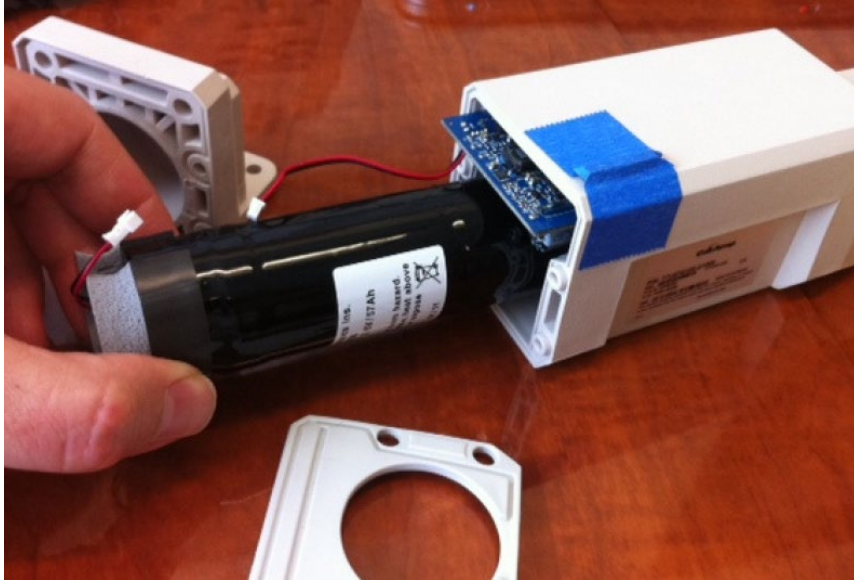

4) Replace Battery Pack

- Slide a replacement battery pack Into the enclosure



5) Reconnect Power Cables

- Replace the gasket and push the white connector halves back together to reconnect the power wires.



6) Replace Battery Cap

- Seat the cap housing to the gasket to ensure a tight fit. Inset the screws, and using a Phillips head screwdriver, turn clockwise until hand tight. Do **NOT** over tighten.

